

ACTIROX AF799



VSM ACTIROX




Grain type	Ceramic
Bond	Full-resin bonded
Colour	Dark Petrol
Backing	Vulcanised fibre
Production width	1,470 mm

Materials



Features



Maximum stock removal and improved chip removal: Even when grinding aluminium. The geometrically shaped ceramic grain achieves fast grinding has a very long service life. Recommended for angle grinders in the upper power range.


Grit range:¹⁾



Benefits

- > Maximum stock removal thanks to geometrically shaped ceramic grain leads to a reduction in operating costs
- > More than twice as much stock removal compared to conventional ceramic grain abrasives
- > Increase in productivity: More workpieces per unit of time due to fast cutting
- > Extremely stable dimensions and a durable vulcanized backing satisfy the highest safety requirements

Grain technology

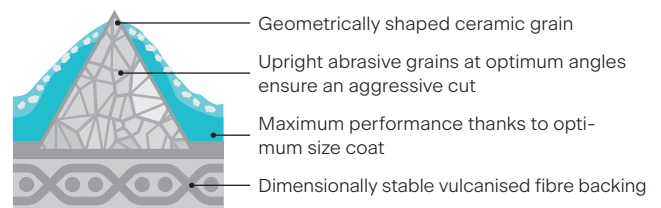

The plus in grinding performance

Practice has shown that **ACTIROX** abrasives have a **higher abrasive performance** than comparable conventional abrasives – with a consistent surface finish.

You achieve **higher stock removal** than you would expect with the specified grit size, but you do not get a rougher surface. A real plus for your grinding process.

VSM · Vereinigte Schmirgel- und Maschinen-Fabriken AG
Siegmundstraße 17 · 30165 Hanover · Germany
T +49 511 3526 479 · F +49 511 3521 315
sales@vsmabrasives.com · www.vsmabrasives.com



¹⁾ Further grit sizes upon request. Subject to technical changes.