

# ACTIROX

# AF890

TOP SIZE



## VSM ACTIROX




Grain type	Ceramic
Bond	Full-resin bonded
Colour	Petrol
Backing	Vulcanised fibre
Production width	1,470 mm

### Materials



### Features



Maximum stock removal rate and a high initial aggressiveness thanks to the geometrically shaped ceramic grain. Ideal for machining stainless steels and superalloys with a cool cut and no discolouration thanks to the TOP SIZE additional grinding-active layer. AF890 achieves its full performance when used with angle grinders in the upper power range.


### Grit range:<sup>1)</sup>



## Benefits

- > Maximum stock removal thanks to geometrically shaped ceramic grain leads to a reduction in operating costs
- > More than twice as much stock removal compared to conventional ceramic grain abrasives
- > Increase in productivity: More workpieces per unit of time due to fast cutting
- > Extremely stable dimensions and a durable vulcanized backing satisfy the highest safety requirements
- > The tailored and extremely hard back-up pad *VSM TURBO PAD 3* leads to a further increase in stock removal
- > Cool grinding processes and extended service lives thanks to the additional grinding-active layer VSM TOP SIZE

## Grain technology

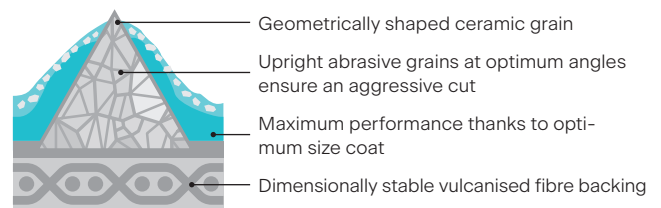

## The plus in grinding performance

Practice has shown that **ACTIROX** abrasives have a **higher abrasive performance** than comparable conventional abrasives – with a consistent surface finish.

You achieve **higher stock removal** than you would expect with the specified grit size, but you do not get a rougher surface. A real plus for your grinding process.

**VSM · Vereinigte Schmirgel- und Maschinen-Fabriken AG**  
Siegmundstraße 17 · 30165 Hanover · Germany  
T +49 511 3526 479 · F +49 511 3521 315  
sales@vsmabrasives.com · [www.vsmabrasives.com](http://www.vsmabrasives.com)



<sup>1)</sup> Further grit sizes upon request. Subject to technical changes.